

KEL-BES-S | Split brush plate

for cable pass-through



Specifications

Material	Polyamide Brushes: Polyamide
Flame class	UL94-V0, self-extinguishing
Operating temperature	-20 C° to 90 C°
Properties	silicone free, halogen free
Mounting options	Screw type mounting,Riveting


Advantages & Benefits

- Fast and easy assembly
- Subsequent assembly possible
- Versatile utilisation
- Allows reduced airflow while filtering out dust, hair and larger particulate matter
- Visual screening
- Protects cables against wear due to sharp edges of the cut-out

Product Types & Sizes


KEL-BES-S 24	Part No.	51522	Cut-out size	112 × 36 mm
	EAN	4251269316	No. of screw holes	4
	Package quantity	10	Diam. of screw holes	5,8 mm
	Length	147 mm		
	Width	58 mm		
	Height	10 mm		
	Mounting height	10 mm		

KEL-BES-S 24 with expanding rivets

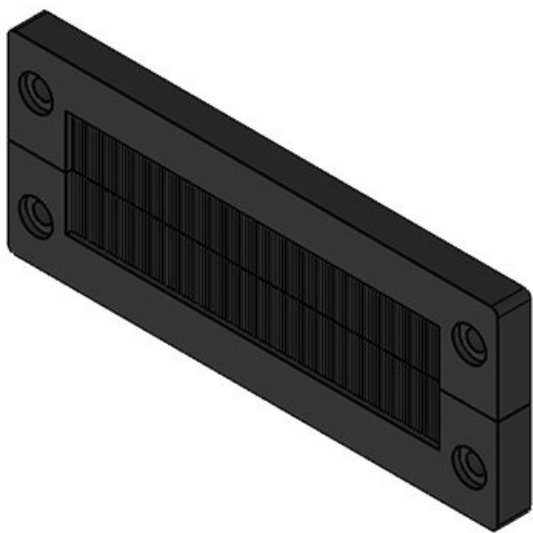

Part No.	51522.002	Cut-out size	112 × 36 mm
EAN	4251269320705	No. of screw holes	4
Package quantity	10	Diam. of screw holes	5,8 mm
Length	147 mm		
Width	58 mm		
Height	10 mm		
Mounting height	10 mm		


KEL-BES-S 16

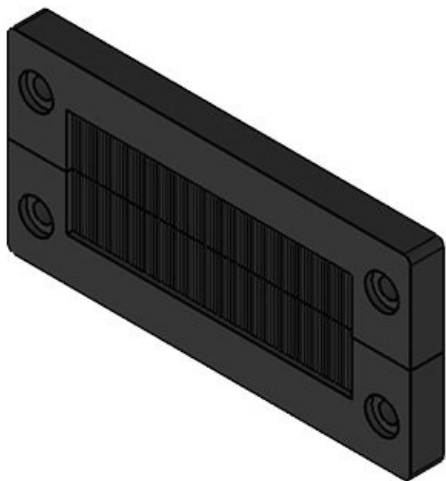

Part No.	51521	Cut-out size	86 × 36 mm
EAN	4251269316593	No. of screw holes	4
Package quantity	10	Diam. of screw holes	5,8 mm
Length	120 mm		
Width	58 mm		
Height	10 mm		
Mounting height	10 mm		


KEL-BES-S 16 with expanding rivets


Part No.	51521.002	Cut-out size	86 × 36 mm
EAN	4251269320699	No. of screw holes	4
Package quantity	10	Diam. of screw holes	5,8 mm
Length	120 mm		
Width	58 mm		
Height	10 mm		
Mounting height	10 mm		

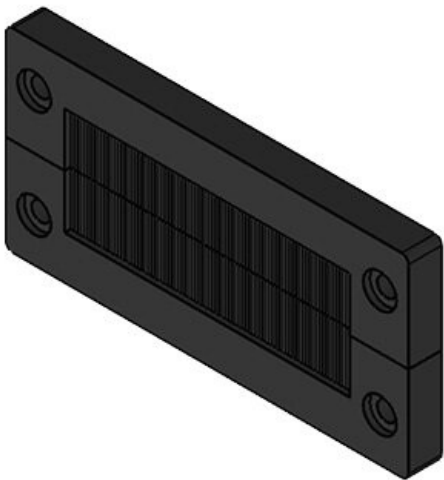

KEL-BES-S 10

Part No.	51520	Cut-out size	65 × 36 mm
EAN	4251269316586	No. of screw holes	4
Package quantity	10	Diam. of screw holes	5,8 mm
Length	100 mm		
Width	58 mm		
Height	10 mm		
Mounting height	10 mm		

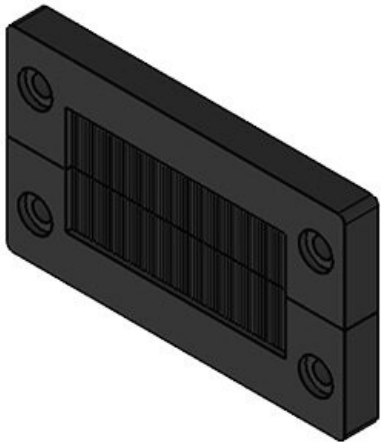

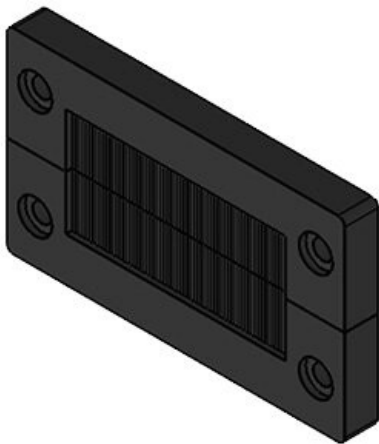

Part No.	51520.002	Cut-out size	65 × 36 mm
EAN	4251269320	No. of screw holes	4
Package quantity	10	Diam. of screw holes	5,8 mm
Length	100 mm		
Width	58 mm		
Height	10 mm		
Mounting height	10 mm		