## **KEL-BES | Brush plate**

for cable pass-through



Brush plates KEL-BES for routing cables into server racks, control panels and electrical enclosures. KEL-BES is also an ideal solution for entry and exit of cables that are routed inside raised floors, e.g. in computer centres.

The brush plates can either be mounted via screws or via  $\underbrace{\text{expanding rivets}}$ .

The KEL-BES plates match exactly the cut-out dimensions 10-, 16- and 24-pin standard industrial connectors.

## **Specifications**

Material	Polyamide Brushes: Polyamide	
Flame class	UL94-V0, self-extinguishing	
Operating temperature	-20 C° to 90 C°	
Properties	silicone free, halogen free	
Mounting options	Screw type mounting, Riveting	

## **Advantages & Benefits**

height

Fast and easy assembly

Versatile utilisation

Allows reduced airflow while filtering out dust, hair and larger particulate matter

Visual screening

Protects cables against wear due to sharp edges of the cut-out

## **Product Types & Sizes**



Part No.	51515	Cut-out size	112 × 36 mm
EAN	4251269315	No. of screw	4
	442	holes	
Package	10	Diam. of screw	5,8 mm
quantity		holes	
Length	147 mm		
Width	58 mm		
Height	10 mm		
Mounting	10 mm		



51510 86 × 36 mm Part No. Cut-out size EAN **4251269315** No. of screw

> 435 holes


Package 10 Diam. of screw 5,8 mm quantity

holes

Length 120 mm Width 58 mm 10 mm Height 10 mm Mounting

height

KEL-BES 10

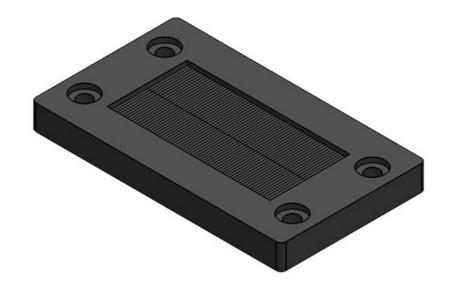

Part No. 51505 Cut-out size 65 × 36 mm 4

EAN **4251269315** No. of screw

428 holes

10 Diam. of screw 5,8 mm Package holes

quantity

Length 100 mm Width 58 mm Height 10 mm Mounting 10 mm

height

