

KEL-QTA |

 / IP54



KEL-QTE , , , .

KEL-QTE 20mm .

IP54

HL3
EN 45545-2

ECOLAB
certified

UV
ISO 4892-2A

Made in
Germany

RoHS
compliant

REACH
COMPLIANCE

UL
US

IP (EN 60529)	IP54
	UL94-V0,
	-40 C° to 100 C°
	UV-, ,
	-
	2 mm

-
-
- KEL
-

EAN

43412

4251269309

793

10

2

3,2 mm

5,2 mm

6 mm

2 mm

1,5 mm



2,5 mm

2,6 mm



1 mm



43413
EAN 4251269309
809
10
2
2 mm
3,8 mm
5,2 mm
6 mm
2 mm
1,5 mm
2,5 mm
3,1 mm
1 mm

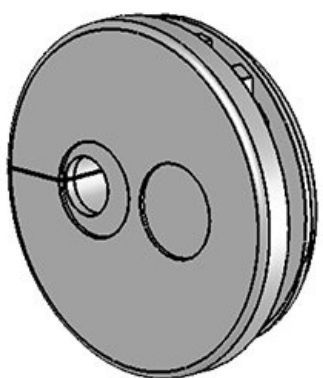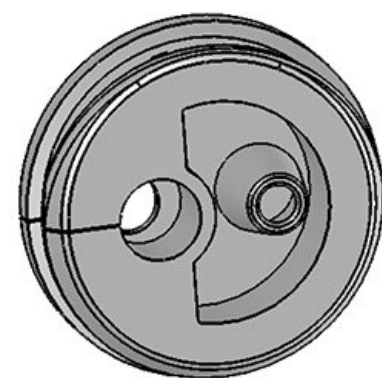

43414
EAN 4251269309
816
10
2
4,8 mm
5,2 mm
6 mm
2 mm
1,5 mm
2,5 mm
3,8 mm
1 mm

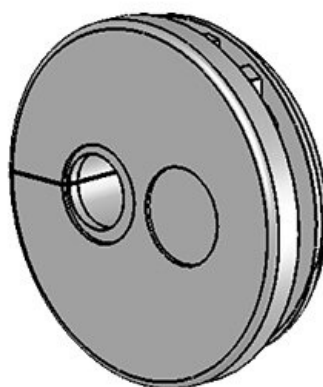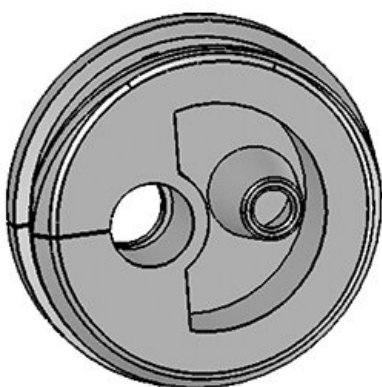

43415
EAN 4251269309
823
10
2
5,6 mm
5,2 mm
6 mm
2 mm
1,5 mm
2,5 mm
4,7 mm
1 mm

