


□□□가 □□□ □□□□, M32 - M63 / IP54

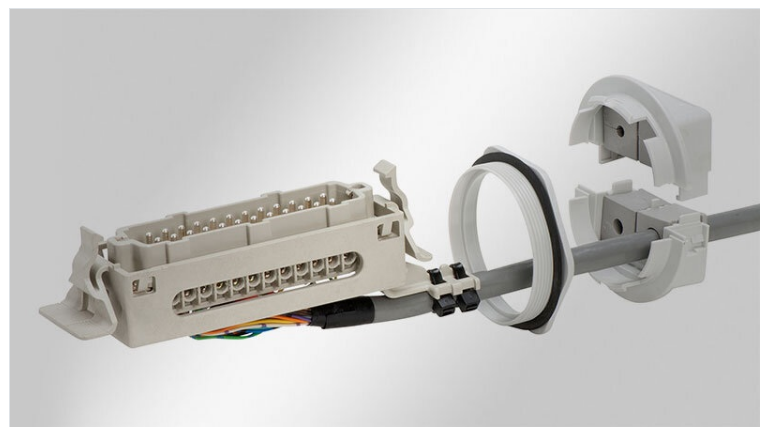


00000 00000 00000 0 0000 KVT0 0000 00 0000 00 0000 00 0 0 00000.

IP 60529 (EN 60529)	IP54
	防塵等級
	UL94-V0, 阻燃等級
	-30 C° to 100 C°
	工作溫度, 攝氏溫度
100 小時	100,000 小時, MTBF

- **모든가 모든 것 이 모든것 이 가**
- **모 모든 모든 모든 모든 것**
- **모든 모든 것 것**
- **모 모든 것 것 모든/모든 모든 것 가**
- **모 모든 모든모든 것**
- **모 것 것 모든 것 이 모든 것 모든 것 모든 것 가**
- **모든 것 모든 것 가**


□ □ □ □ □ □ □



45130
4251269311260
10
4
16 mm
□□(RAL 7035 □ □)
40 mm

□□□ □□
□□□□ □□

21 mm
M32
32,3 mm
M32 x 1,5
11 mm
1 x KT □□




□□ □□□

45134
4251269311277
10
4
16 mm
□□(RAL 7035 □ □)
40 mm

□□□ □□
□□□□ □□

21 mm
M40
40,4 mm
M40 × 1,5
11 mm
1 x KT




□□ □□□

45152
4251269311284
5
16
17 mm
□□(RAL 7035 □ □)
70,5 mm

□□□ □□
□□□□ □□

21 mm
M63
63,4 mm
M63 × 1,5
11 mm
4 x KT □□



EAN

□□□ □
□□ □□□ □□

□□ □□□

45154
4251269311291
5
1
35 mm
□□(RAL 7035 □ □□)
70,5 mm

□□ □□
□□□□ □□ □□□
□□ □□ □□□

□□□ □□
□□□□ □□

21 mm
M63
63,4 mm
M63 × 1,5
11 mm
1 x KT □

icotek[®]
smart cable management