



□□□ □□□ □□□ □□□ □ □□ □□□□ □□□ □□□□ / □□ IP66 / UL Type 12/4X*




□□□□ (KEA + ...):

- KEL-ER 24: IP54, IP65
- KEL-U 24: IP54
- KEL 24: IP54
- KEL-DPU 24: IP54, IP65
- KEL-DPZ 24: IP54, IP65, IP66
- KEL-DP 24 B: IP54


*4X □□ □□ (KEA 24 W90 S)

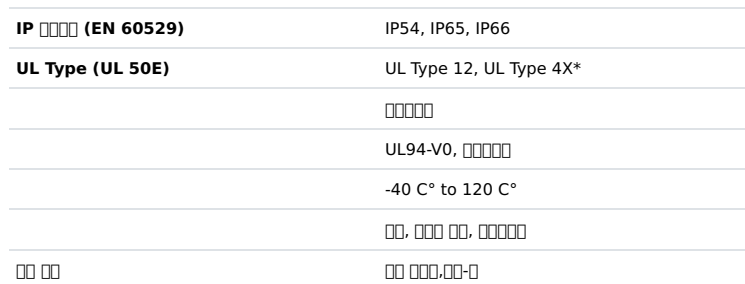

- ▶ 0000 0000 000000 90° 000 00 가하
- ▶ 0000 0000 000000 00가 00 00(R 00) 00
- ▶ 0000 24 0000 0000 000000 00 00 00
- ▶ 0000 000000 00 0000 000000 0000 00
- ▶ 000000 000024 000000 0000 00 00 90° 0000
- ▶ 00 0000 00000000 000000 00 0000 0 00 00
- ▶ 가하000 000000 0000
- ▶ 0 0000 00 00 00
- ▶ 000000 000000 0000 00 00 0000

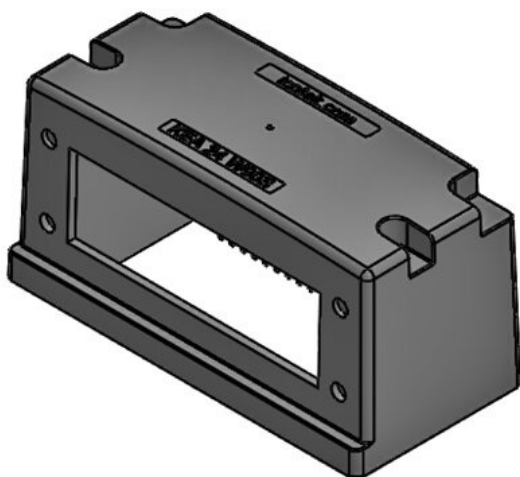

EAN	48301	□□ □□	112 × 56 mm
	4251269334658	□□ □ □	4
	1	□□□ □□	6 mm
	157 mm	□□ :	KEL-ER 24, KEL-U
	75 mm		24, KEL 24, KEL-
□□ □□	77 mm		DPZ 24, KEL-DPZ
	77 mm		24

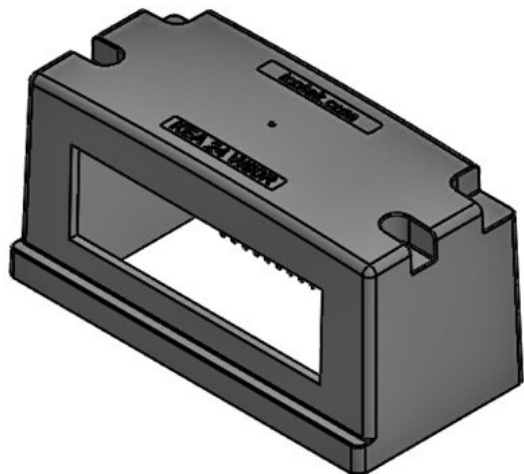

EAN

48300
4251269334641
1
157 mm
75 mm
77 mm
77 mm

□□ □□□
□□ □ □
□□□ □□
□□ :

112 × 56 mm
4
6 mm
KEL-DP 24 B

□□ □□

icotek[®]
smart cable management